Husqvarna

PRODUCT RANGE 2026

NEW

MANAGE DUST WITH CONFIDENCE. THE NEXT-GENERATION AIR CLEANERS.

NEW

MEET THE NEWEST MEMBERS OF THE PACE 94V BATTERY PLATFORM: SOFF-CUT® 150 PACE AND LF PACE FORWARD PLATE COMPACTORS.

NEW


AUTOGRINDER™ – THE SELF-OPERATING FLOOR GRINDER.



HUSQVARNA CONSTRUCTION

HUSQVARNA. EXPECT MORE.

With Husqvarna Construction as your business partner, you can expect more. Not just from our equipment and diamond tools, but from us. More support so you can perform at your best. More smart ideas to keep your business at the cutting edge. More concern for your health. And more care for our environment. Because we know the more we put in, the more you get out.

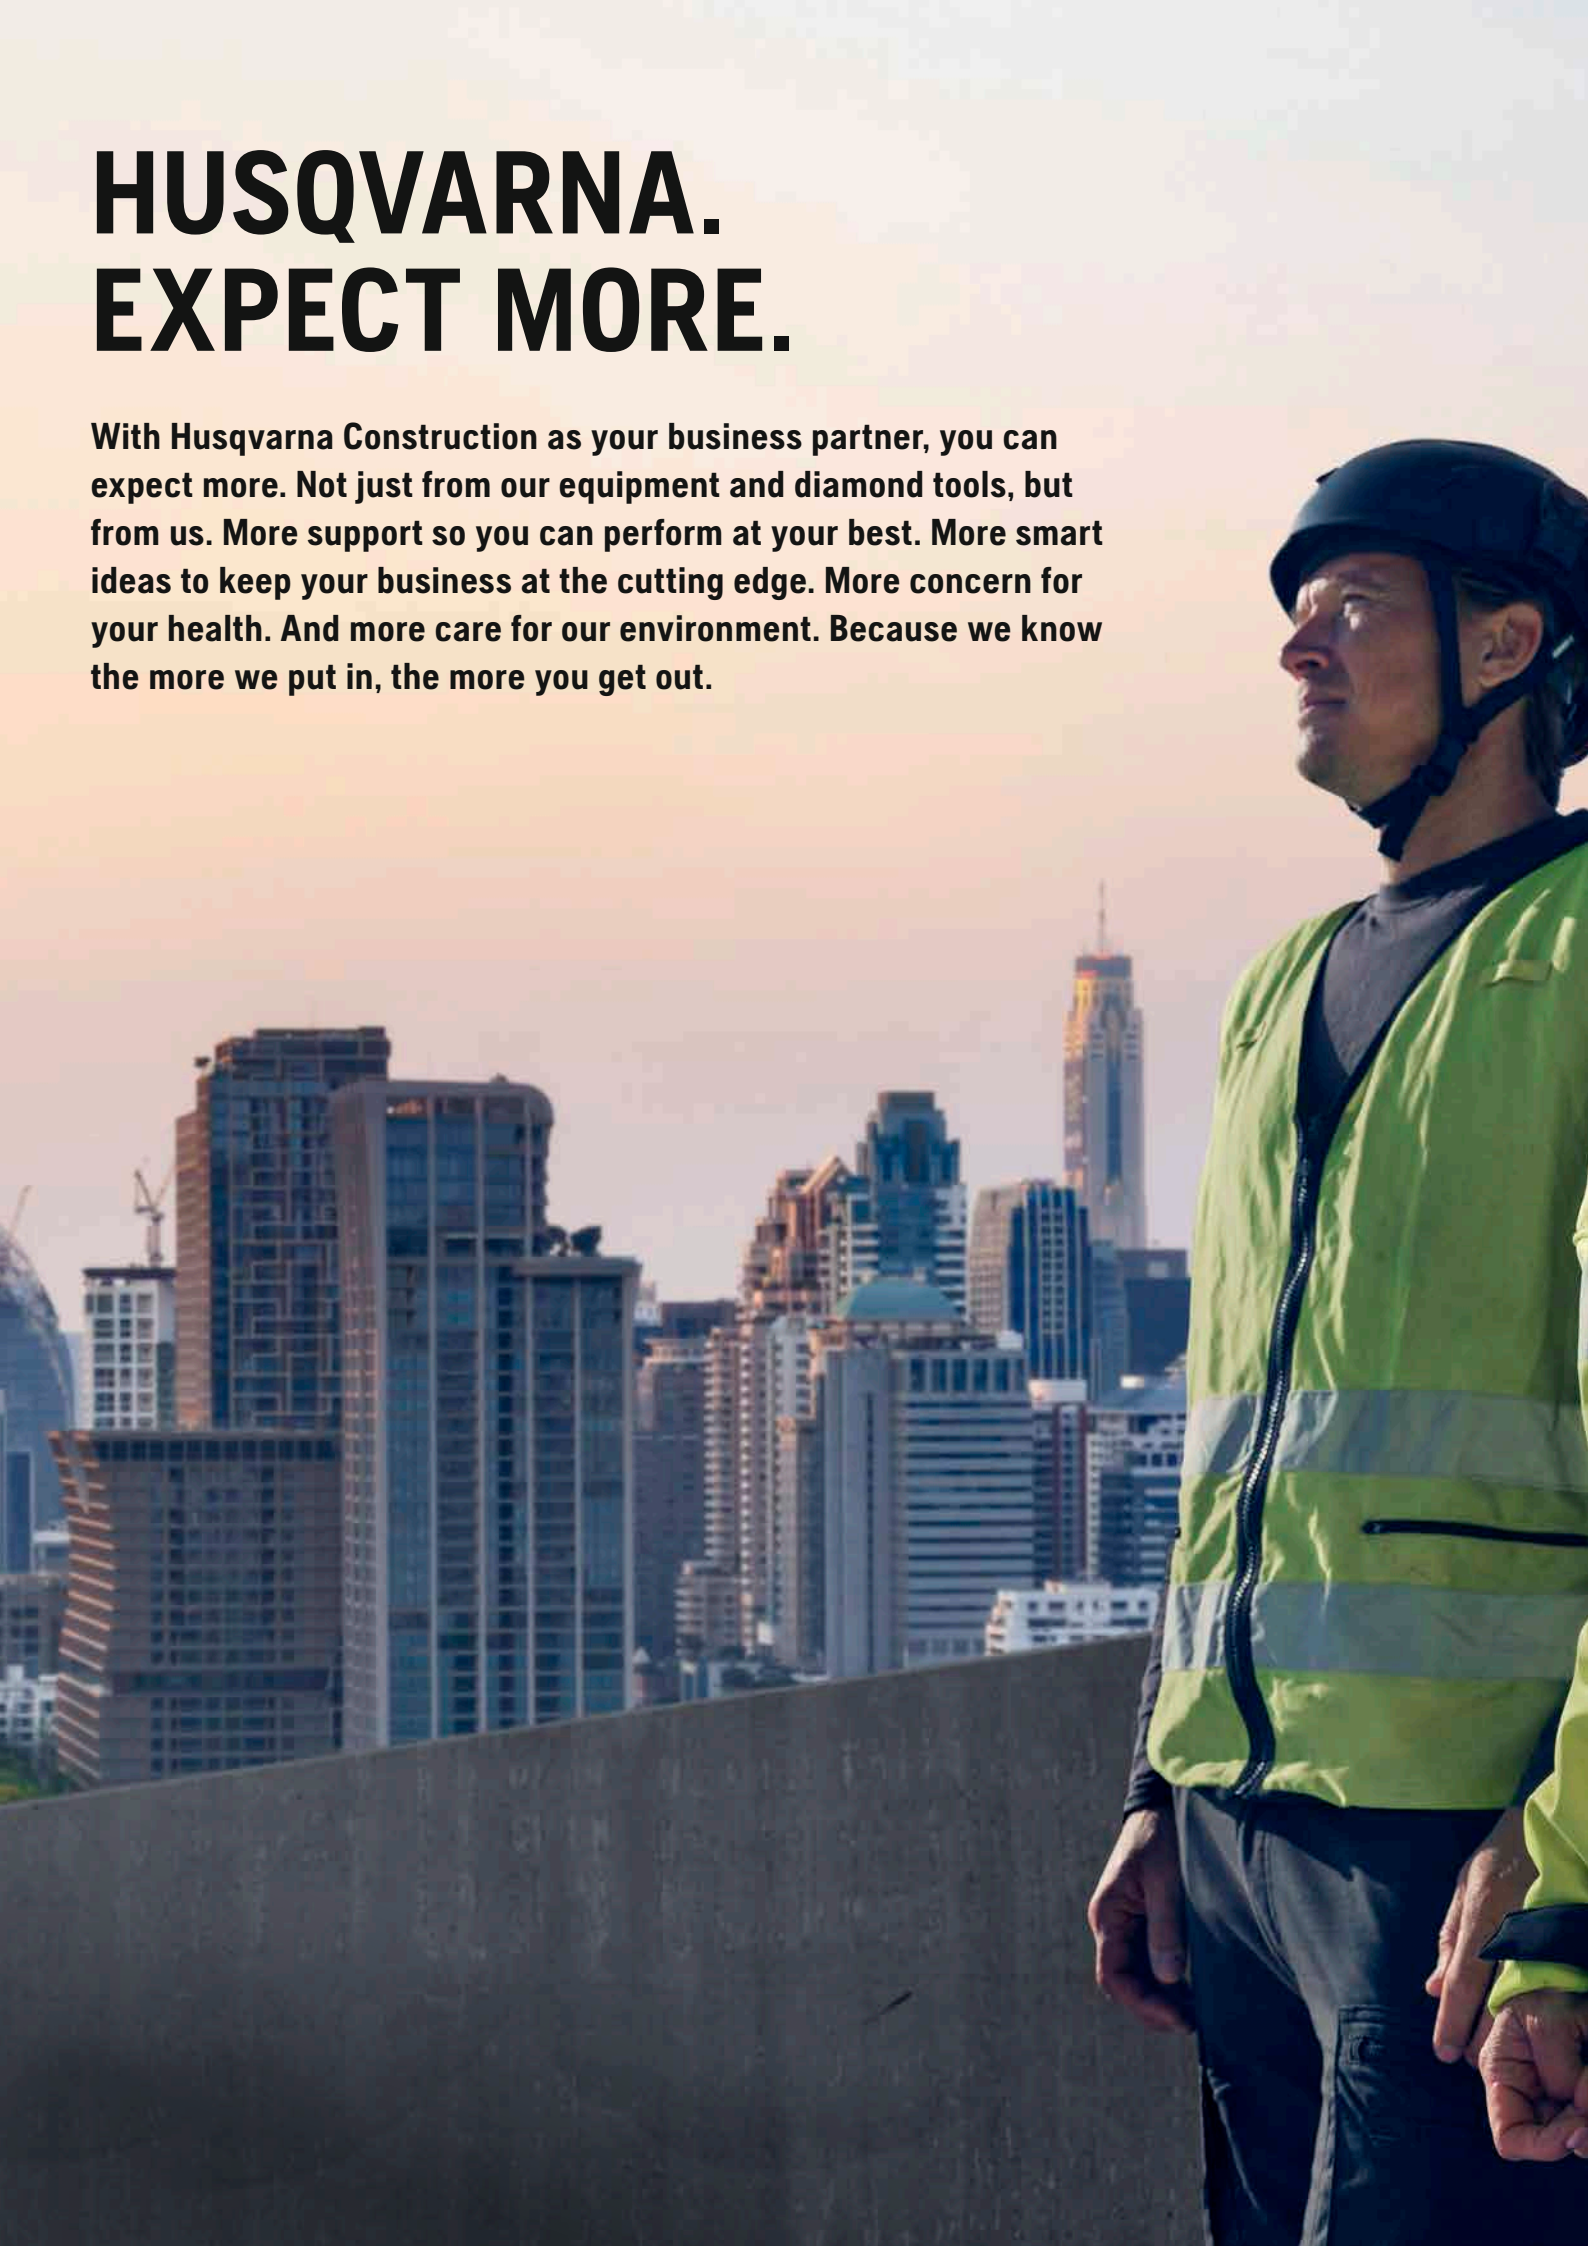





A WIDE RANGE OF SERVICES TO SUPPORT YOUR BUSINESS

Husqvarna services are developed to support the daily operations of you and your staff working in the construction business. Depending on where you work – at a construction site, in an office or in a workshop – we offer a specific solution tailored for you. Our services cover a wide scope, from financing, fleet management, extended warranties and service contracts to training and assistance for users and workshops.

HUSQVARNA MAINTENANCE CONTRACT

The best way to prevent operational issues is to have your equipment checked regularly by someone who has the proper knowledge, parts and tools. Following your equipment's maintenance plan, you can detect potential errors and choose to replace worn parts before they cause problems. Additionally, you know exactly what your maintenance needs will cost you over the contract's duration.

HUSQVARNA REPAIR AND MAINTENANCE CONTRACT

Repairs and maintenance are natural parts of any operation. But scheduling and keeping track of service times can be time-consuming and often result in unwanted costs, as well as unplanned downtime. With a Husqvarna Repair and Maintenance Contract you will safeguard your operation and your machine availability, leaving you free to focus on your core business – getting the job done.



CHARGED WITH POSSIBILITIES

Battery technology has come of age, and we leave no stone unturned in the pursuit of excellence for our battery-powered construction equipment. By bringing together all the insight and innovation at Husqvarna, we keep our customers right at the forefront of new developments. With proven battery performance and reliability in more demanding applications, our machines provide major benefits for you, your business and society.
Go to husqvarnaconstruction.com for more information.

HUSQVARNA PACE™ BATTERY PLATFORM

So much more becomes possible with the high power delivered by the PACE™ 94V platform battery-powered products. The batteries are available in two sizes and deliver high performance for demanding professionals on the go. Machines using this growing platform are setting high standards for the industry. Husqvarna K 1 PACE has been recognised with a Red Dot design award for user-friendly design, a PITA Tool Innovation Award and a nomination for a World Demolition Award for innovation.



POWER CUTTER
HUSQVARNA K 1 PACE
7.2/7.4 kg, blade size 300/350 mm, cutting depth 121/145 mm.



POWER CUTTER
HUSQVARNA K 1 PACE RESCUE
7.9 kg, blade size 350 mm, cutting depth 145 mm.



POWER CUTTER
HUSQVARNA K 1 PACE RAIL
7.9 kg, blade size 356 mm, cutting depth 133 mm. PACE 94V battery platform.

NEW



ULTRA EARLY ENTRY™ SAW
HUSQVARNA SOFF-CUT 150 PACE
Diamond blade max 165 mm, cutting depth max 38 mm, 41 kg, 2.7 kW.

NEW



FORWARD PLATE COMPACTOR
HUSQVARNA LF 75 PACE
1.3 kW, 420 mm, 85 kg without battery, centrifugal force 15 kN.

NEW



FORWARD PLATE COMPACTOR
HUSQVARNA LF 100 PACE
1.5 kW, 500 mm, 100 kg without battery, centrifugal force 17 kN.



DRILL MOTOR
HUSQVARNA DM 1 PACE
2.5 kW, recommended drill diameter 25–400 mm, 17.3 kg (incl. battery).



DUST EXTRACTOR
HUSQVARNA DE 120 H PACE
High safety standards. Easy to transport. Operate more sustainably with e-flow. 480 m³/h, 41 kg.



WORK LIGHT
WL 24 PACE
Battery-powered tower light. Up to 24,000 lumen and 35 hours run time with B750X PACE. AC power cable as accessory. 22.5 kg.

BATTERIES AND CHARGERS



BATTERIES
HUSQVARNA B380X/B750X PACE
High-power 94V PACE™ batteries equipped with built-in connectivity. Capacity: 375/750 Wh, weight 3/5 kg.



CHARGERS
HUSQVARNA C900X/C1800X
High-power battery chargers with a fast charging mode and active cooling. Power 900 W/1800 W.



BATTERY BOX
HUSQVARNA PACE BATTERY BOX
A sturdy, durable wooden box for the convenient protection and transportation of two PACE batteries and one charger. UN 3480 certified for transporting lithium-ion batteries.

ACCESSORIES PACE™



K 1 PACE VAC ATTACHMENT
Ideal dust collection enables you to cut without water.



HUSQVARNA KV 1
Cutting trolley designed for the K 1 PACE battery-powered cutter. Water tank 10 l.

DIAMOND BLADES PACE™



B **HUSQVARNA TACTI-CUT S 35 S PACE**
Provides a good balance between performance and price in all cutting operations. Low vibrations with the continuous rim and silence core.



S **HUSQVARNA ABRASIVE DISCS**
Conventional abrasive disc especially recommended for cutting metal and rebars. Suitable for use in standard PC.



S **HUSQVARNA VARI-CUT FR3**
Has one layer of vacuum-brazed diamonds for the fast cutting of a large variety of materials like tile, stone, rebars, fibre board, PVC pipe and more. Suitable for use in standard PC.

HUSQVARNA BLi-X BATTERY PLATFORM

Power meets versatility with our BLi-X 36V battery-powered products. Lightweight and powerful, this platform is versatile for a variety of construction applications and is compatible with a wide range of Husqvarna tools for forestry and landscaping. The tools have been optimised to provide higher performance and better utilisation of battery power.



POWER CUTTER
HUSQVARNA K 540i
4.17 kg, blade size 267 mm, cutting depth 100 mm.



FORWARD PLATE COMPACTOR
LF 60i LAT
1.2 kW, 350 mm, 69 kg. Ideal for hardscaping work. Includes water tank, transport wheels and low-vibration handle. Optional block paving kit available.



DUST EXTRACTOR
HUSQVARNA DE 110i H
Versatile and compact H-class dust extractor. 215 m³/h, 26 kg.



DRILL MOTOR
HUSQVARNA DM 540i
1350 W, recommended drill diameter 15–75 mm (100 mm with drill stand), 4.9 kg.



BATTERY SCREED
HUSQVARNA BV 30i
Output power 0.8 kW, weight 11.5 kg.

BATTERIES AND CHARGERS



CHARGERS
HUSQVARNA C500X/C750X
Quick-charging unit with 2-LED status indicator and active battery cooling for minimum charging time and longer battery life.



BATTERIES
HUSQVARNA B140X/B220X/B330X
Sturdy design with IPX4-rating for all-weather usage. Equipped with an active cooling system, it maintains optimal temperatures during both use and charging. 4/6/9Ah, 1.3/1.4/1.9 kg.

NEW



HUSQVARNA 40-B330X/ 40-C500X POWER KIT
A robust yet lightweight and handy transportation box that includes two 40-B330X batteries and one 40-C500X fast charger.



HUSQVARNA BATTERY BOX C1000X4
Multi-charger that enables simultaneous high-power charging of up to four Husqvarna BLi-X 36 V batteries in a single unit. Thanks to smart load balancing, all batteries are charged quickly and efficiently. Fulfils IPX4 waterproof rating for use in all weather conditions.

ACCESSORIES

NEW



HUSQVARNA WT 60i
A mobile 60-litre battery-powered water tank designed to supply water over long periods of operation. The capacity is sufficient to handle chainsaw and ring-saw applications.



WATER TANK
HUSQVARNA WT 15i
Compact and easy-to-use water tank with electric pump. Has a capacity of 15 litres. Battery-powered, 36 V BLi-X platform.



K 540i VAC ATTACHMENTS
Ideal dust collection enables you to cut without water.



WORK LIGHT
HUSQVARNA WL 8i
Extremely durable and powerful – up to 8000 lumen. Easy to carry and position, change from flood light to 360 degree area light using the light diffuser accessory. Built-in power bank with USB outlet. Tripod accessory gives an adjustable height between 1.35 and 3 m. Max run time 48 hours (with BLi-X 300), 3.5 kg.

DIAMOND TOOLS BLi



G **HUSQVARNA ELITE-CUT S 35 S BAT**
Developed for smooth and fast cutting in diverse materials such as concrete, brick, blocks and natural stone. With this blade you will experience reduced side friction, lower vibrations, and better slurry evacuation.



B **HUSQVARNA TACTI-CUT S 35 S BAT**
Optimised for cutting in materials such as concrete, brick, blocks and natural stone. Thanks to the segment shape and composition, the blades provide an easier and freer cut, which results in reduced vibration levels and a smoother cutting experience.



S **HUSQVARNA VARI-DISC STEEL**
Conventional abrasive disc especially recommended for cutting metal and rebars.



S **HUSQVARNA VARI-CUT FR3**
Has one layer of vacuum-brazed diamonds for the fast cutting of a large variety of materials like tile, stone, rebars, fibre board, PVC pipe and more.



G **HUSQVARNA ELITE-DRILL D 10 TW**
For handheld drilling in brick and lightly reinforced concrete. Wet drilling.



G **HUSQVARNA ELITE-DRILL D 1610**
Developed and optimised for DM 1 PACE. For lower power ratings of 2.5–3 kW.



G **HUSQVARNA ELITE-DRILL D 65 DRY**
Main drill bit for DM 540i. Allows drilling in sensitive environments or when water is not accessible.

WE'LL LET NOTHING STOP YOU FROM SAWING AND DRILLING

Our range of wall and wire saws, floor saws, handheld power cutters, core drills and diamond tools is among the widest and most powerful in the world. This means that whatever job you're up to, we can provide the equipment you need to meet your challenge. Go to husqvarnaconstruction.com for more information.



DIAMOND BLADES WITH SMARTER FEATURES

To help customers use products safely, and experience better performance when operating a handheld power cutter, Husqvarna offers smarter features in the Elite-Cut, Vari-Cut and Tacti-Cut series. The smarter features give the operator a clear and immediate overview of the blade's wear, side clearance, direction of rotation and intended application.



DIAMOND TOOLS IN THREE PERFORMANCE LEVELS

Husqvarna diamond tools come in three performance levels: ELITE, VARI and TACTI, represented by the colours Gold, Silver and Bronze, respectively.

ELITE

Our ELITE diamond tools are developed for highly demanding professionals working on specialist applications and intensive jobs. They provide maximum cutting speed and wear resistance in heavy cutting, grinding and drilling.

VARI

Our VARI diamond tools are developed for demanding professionals doing a variety of quick jobs during a workday in various all-round applications. They provide high cutting speed and wear resistance in all cutting, grinding and drilling.

TACTI

Our TACTI diamond tools are developed for demanding professionals working occasionally with cutting and drilling jobs, looking for the optimal balance between cutting and price in all common cutting and drilling applications.

CONCRETE CORE DRILLS, DRILL MOTORS WITH STANDS AND DRILL STANDS



BATTERY-POWERED
HUSQVARNA DM 540i
1350 W, recommended drill diameter 15–75 mm (100 mm with drill stand), 4.9 kg. BLi-X 36 V battery platform.



BATTERY-POWERED
HUSQVARNA DM 1 PACE
2.5 kW, recommended drill diameter 25–400 mm, 17.3 kg (incl. battery).



PRIME
ELECTRIC-POWERED
HUSQVARNA DM 700
6000/3000 W, 3-phase/1-phase, recommended drill diameter 80–600 mm, 14 kg.



ELECTRIC-POWERED
HUSQVARNA DM 430
3200 W, 1-phase, recommended drill diameter 100–450 mm, 15.5 kg.



ELECTRIC-POWERED
HUSQVARNA DM 400
3200 W, 1-phase, recommended drill diameter 55–350 mm, 14 kg.



ELECTRIC-POWERED
HUSQVARNA DM 370
3200 W, 1-phase, recommended drill diameter 25–250 mm, 14 kg.



HYDRAULIC-POWERED
HUSQVARNA DM 406 H
120/230/340/580/980/1400 rpm, recommended drill diameter 0–650 mm, 16 kg.



ELECTRIC-POWERED
HUSQVARNA DM 230
1850 W, 1-phase, recommended drill diameter 150 mm, handheld 80 mm, 7 kg.



ELECTRIC-POWERED
HUSQVARNA DM 220
1850 W, 1-phase, recommended drill diameter 150 mm, handheld 80 mm, 7.5 kg.

NEW



ELECTRIC-POWERED
HUSQVARNA DM 210 SP
2000 W, 1-phase, recommended drill diameter for concrete <150 mm, masonry <202 mm, handheld <75 mm, 6.5 kg.



ELECTRIC-POWERED
HUSQVARNA DM 200
2000 W, 1-phase, recommended drill diameter 25–100 mm, 6.4 kg.



ELECTRIC-POWERED
HUSQVARNA DMS 240
2400 W, 1 phase, max ∅ 250 mm, 20.4 kg.



ELECTRIC-POWERED
HUSQVARNA DMS 160 AT
1550 W, 1 phase, max ∅ 120 mm, 10.5 kg.



ELECTRIC-POWERED
HUSQVARNA DMS 160 A
1550 W, 1 phase, max ∅ 120 mm, 12 kg.

HUSQVARNA DS 900
∅ 900 mm, travel length 950 mm, 24 kg.



HUSQVARNA DS 500
∅ 500 mm, travel length 706 mm, 18 kg.



HUSQVARNA DS 250/ DS 250 SINGLE SPEED
∅ 250 mm, travel length 685 mm, 16 kg.



HUSQVARNA DS 150
∅ 150 mm, travel length 495 mm, 15.5 kg.





HUSQVARNA DS 50 COMBI
∅ 300 mm, travel length 1090 mm, 21 kg.



HUSQVARNA DS 50 GYRO
∅ 350 mm, travel length 670 mm, 56 kg.



HUSQVARNA DS 40 GYRO
∅ 150 mm, travel length 600 mm, 30 kg.

DIAMOND CORE DRILL BITS



G **HUSQVARNA ELITE-DRILL D10 TW AND ELITE-DRILL D20 TW**
ELITE-DRILL TW series is specially designed for battery-powered and low-powered handheld drill motors. Experience faster and smoother drilling with a quick and precise start. ELITE-DRILL TW is a range of thin walled drill bits for wet drilling. 1/2" gas connector.



G **HUSQVARNA ELITE-DRILL D1600 SERIES**
ELITE-level drill bits that deliver smooth, fast drilling in demanding applications. Available for various materials like heavily reinforced concrete, hard aggregate and abrasives. Diameters 92–350 mm.



S **HUSQVARNA VARI-DRILL**
VARI-level drill bits with great performance and durability in heavy-duty applications. Diameters from 18–300 mm in two versions depending on the application. 1 1/4" connector.



B **HUSQVARNA TACTI-DRILL**
TACTI-level drill bits with a good price/ performance value for non-intensive use in heavier applications. Diameters from 52–300 mm. 1 1/4" connector.



S **HUSQVARNA VARI-DRILL DRY**
Lightweight drill bits for dry indoor drilling by specialist professionals. Two versions available. Vacuum-brazed segments for drilling tile and natural stone. Diameters 5–85 mm. Laser-welded segments for drilling concrete, brick, and cement blocks. Diameters 37–200 mm.



ELITE-DRILL D20 DRY
ELITE-level drill bit for high-speed dry coring in reinforced concrete and masonry, compatible with most 2 kW soft percussion drill motors. Suitable for handheld use and for use with a drill stand.

POWER CUTTERS



BATTERY-POWERED
HUSQVARNA K 1 PACE
7.2/7.4 kg, blade size 300/350 mm, cutting depth 121/145 mm. PACE 94V battery platform.



BATTERY-POWERED
HUSQVARNA K 1 PACE RESCUE
7.9 kg, blade size 350 mm, cutting depth 145 mm. PACE 94V battery platform.



BATTERY-POWERED
HUSQVARNA K 1 PACE RAIL
7.9 kg, blade size 356 mm, cutting depth 133 mm. PACE 94V battery platform.



POWER CUTTER
HUSQVARNA K 540i
4.17 kg, blade size 267 mm, cutting depth 100 mm.



PETROL-POWERED
HUSQVARNA K 1270
119 cc, 5.8 kW, 13.3/13.7 kg, blade size 350/400 mm, cutting depth 118/145 mm.



PETROL-POWERED
HUSQVARNA K 970
94 cc, 4.8 kW, 11/11.6 kg, blade size 350/400 mm, cutting depth 125/155 mm.



PETROL-POWERED
HUSQVARNA K 970 SMARTGUARD
94 cc, 4.8 kW, 11.9/12.8 kg, blade size 350/400 mm, cutting depth 125/155 mm.



PETROL-POWERED
HUSQVARNA K 770
74 cc, 3.7 kW, 10/10.1 kg, blade size 300/350 mm, cutting depth 100/125 mm.



PETROL-POWERED
K 770 WITH OILGUARD
74 cc, 3.7 kW, 10/10.1 kg, blade size 300/350 mm, cutting depth 100/125 mm.



PETROL-POWERED
HUSQVARNA K 770 SMARTGUARD
74 cc, 3.7 kW, 11.1 kg, blade size 350 mm, cutting depth 125 mm.



PETROL-POWERED
HUSQVARNA K 770 DRY CUT
74 cc, 3.7 kW, 12.0 kg, blade size 305 mm, cutting depth 123 mm.



PETROL-POWERED
HUSQVARNA K 970 RING
94 cc, 4.8 kW, 13.8/14.2 kg, blade size 370/430 mm, cutting depth 270/325 mm.



PETROL-POWERED
HUSQVARNA K 760 CUT-N-BREAK
74 cc, 3.7 kW, 11.1 kg, blade size 230 mm, cutting depth 400 mm.



PETROL-POWERED
HUSQVARNA K 970 CHAIN
94 cc, 4.8 kW, 9.7 kg, bar size 500 mm, max cutting depth 550 mm.



PETROL-POWERED
HUSQVARNA K 1270 RAIL
119 cc, 5.8 kW, 20.5/21.2 kg (incl. RA10), blade size 350/400 mm, cutting depth 118/145 mm.



PETROL-POWERED
HUSQVARNA K 970 RESCUE
94 cc, 4.8 kW, 11 kg, blade size 350 mm, cutting depth 125 mm.



PETROL-POWERED
HUSQVARNA K 770 RESCUE
74 cc, 3.7 kW, 9.6 kg, blade size 300 mm, cutting depth 100 mm.



HYDRAULIC-POWERED
HUSQVARNA K 3600 MK II
150 bar/40 l min, 4.3 kW, 8.3 kg, blade size 370 mm, cutting depth 270 mm.



HYDRAULIC-POWERED
HUSQVARNA K 2500
150 bar/40 l /min, 5.2 kW, 8.3 kg, blade size 400 mm, cutting depth 145 mm.



AIR-POWERED
HUSQVARNA K 40
7 kp/cm², 3.2 kW, 9.9 kg, blade size 350 mm, cutting depth 125 mm.



PRIME
ELECTRIC-POWERED
HUSQVARNA K 7000
230/400 V, 5.5 kW (3-phase)/3 kW (1-phase), 9.8 kg, blade size 400 mm, cutting depth 155 mm.



PRIME
PETROL-POWERED
HUSQVARNA K 7000 RING
230/400 V, 5.5 kW (3-phase)/3 kW (1-phase), 13.1/12.4 kg, blade size 350/425 mm, cutting depth 270/325 mm.



PRIME
ELECTRIC-POWERED
HUSQVARNA K 7000 CHAIN
230/400 V, 5.5 kW (3-phase)/3 kW (1-phase), 9.1 kg, bar size 500 mm, max cutting depth 550 mm.



ELECTRIC-POWERED
HUSQVARNA K 7000 CHAIN FLUSHCUT
230/400 V, 5.5 kW (3-phase) /3 kW (1-phase), 9.4 kg, bar length 500 mm, max cutting depth 550 mm.



ELECTRIC-POWERED
HUSQVARNA K 4000
230/120/110 V, 2700/1800/2200 W, 8.5 kg (incl. Vac attachment 1 kg), blade size 350 mm, max. cutting depth 125 mm.



ELECTRIC-POWERED
HUSQVARNA K 4000 CUT-N-BREAK
230/120/110 V, 2700/1800/2200 W, 8.9 kg, blade size 230 mm, cutting depth 400 mm.

DIAMOND TOOLS FOR POWER CUTTERS

STANDARD




G **HUSQVARNA ELITE-CUT**
ELITE-level blades with Exo-Grit segments for a smooth, efficient cut – even in reinforced concrete. Diameters 300 – 400 mm in several versions optimised for different materials.



S **HUSQVARNA VARI-CUT**
VARI-level blades tailored for demanding professionals working on a variety of quick jobs. The new increased segment height provides higher speed and extended blade life. Diameters 300 – 400 mm in several versions optimised for different materials.



B **HUSQVARNA TACTI-CUT**
TACTI-level blades optimised for less intensive professional cutting in most materials. Diameters 300 – 400 mm in several versions optimised for different materials.



G **HUSQVARNA ELITE-CUT S1610/S1620**
Designed for handheld wall sawing jobs where time is crucial. Using the high-frequency power of the PRIME™ system, these blades enable you to get demanding tasks done faster. Both are available with segment widths for pre-cutting applications.



G **HUSQVARNA ABRASIVE DISCS**
S Top-grade abrasive discs that can cut practically any material, such as stone, steel and railway rail. Diameters 300–400 mm.

BATTERY



G **HUSQVARNA ELITE-CUT S35 BAT**
Providing maximum cutting speed and wear resistance in all heavy cutting jobs.



B **HUSQVARNA TACTI-CUT S35 PACE™**
Providing a good balance between performance and price in all cutting operations.



B **HUSQVARNA TACTI-CUT S35 BAT**
Providing a good balance between performance and price in all cutting operations.

SPECIAL APPLICATION



G **HUSQVARNA CUT-N-BREAK BLADE**
For the K 760 / K 4000 Cut-n-Break. ELITE-level blades with a segment shape that produces excellent cutting characteristics and performance. Available in three hardness levels.



G **HUSQVARNA ELITE-RING**
ELITE- level ring saw blades designed for optimal cutting speed, even in the hardest reinforced concrete. Three hardness levels. Available in Pre-Cut version with 6.0 mm-wide segments. Diameters 370 and 425 mm.



S **HUSQVARNA VARI-RING**
VARI-level ring saw blades available in three hardness levels. Diameters 370 mm and 425 mm.



S **HUSQVARNA RESCUE BLADES**
Blades with brazed diamond technology for all-round free cutting in materials such as concrete, rubber, brick, metal and steel, etc. Suitable for rescue applications. Diameters 300 – 400 mm.



G **HUSQVARNA GUIDE BAR 400 MM / 16" AND 500 MM / 20"**
Guide bars developed to be the optimal choice of cutting equipment for any Husqvarna concrete chainsaw. Fits both new and older models of Husqvarna concrete chainsaws.



G **HUSQVARNA ELITE-CHAIN 400 mm/16" AND 500 mm/20"**
A range of professional, premium and quality chains for sawing in reinforced concrete and other construction materials.



S **HUSQVARNA VARI-CHAIN 400 mm/16" AND 500 mm/20"**
Ideal for demanding professionals, this is a chain that delivers high cutting speed in various all-round construction applications.



G **HUSQVARNA FR3 CHAINS**
S **400 mm/16" AND 500 mm/20"**
A range of professional, premium and quality chains for cutting metal pipes (such as ductile iron and cast iron), it also handles plastic pipes like PVC and occasional HDPE with ease.

CUTTING TROLLEYS



HUSQVARNA KV 7
Cutting trolley designed for K 760 and K 770. Water tank 10 l.



HUSQVARNA KV 1
Cutting trolley designed for the K 1 PACE battery-powered cutter. Water tank 10 l.



HUSQVARNA KV 9/12
Cutting trolley designed for K 970 and K 1270. Water tank 10 l.

ACCESSORIES FOR POWER CUTTERS

NEW



BATTERY-POWERED
HUSQVARNA WT 60i
A mobile 60-litre battery-powered water tank designed to supply water over long periods of operation. The capacity is sufficient to handle chainsaw and ring-saw applications.



BATTERY-POWERED
HUSQVARNA WT 15i
Compact and easy-to-use water tank with electric pump. Has a capacity of 15 litres. Battery-powered, 36 V BLi-X platform.



HUSQVARNA WT 10 MP
Pressurised water tank, superb when there's no water supply. Pump a few times for the required work pressure. Hose included for connecting to the machine's wet cutting kit. Holds 10 litres.



HUSQVARNA WHEEL KIT
Wheel kit enables easy movement on flat surfaces or when cutting on the ground. Fits: K 1 PACE, K 770, K 970, K 1270



HUSQVARNA WA 20
WA 20 is a rail which enables safe and effective way to cut straight in walls and floors. Attachment available for K 7000 Ring and K 2500.



HUSQVARNA PIPE CLAMP KIT
For use with Husqvarna K 970 Ring and Chain and K 7000 Ring and Chain. A convenient accessory for producing straight, precise cuts in concrete and iron pipes.



HUSQVARNA RA 10/RA 10S/RA 11
Cutting attachment for the K 1270 Rail and K 1 PACE Rail.



HUSQVARNA VAC ATTACHMENT
Ideal dust collection enables you to cut without water. Options for K 1/K 540i and K 4000.

EQUIPPED FOR THE JOB

SmartGuard™ is a line of innovative protective equipment, with features that help you do your job efficiently and in control of your operational safety – without compromising on your comfort or mobility.



HUSQVARNA SMARTGUARD™ HELMET PE 10 H
A robust and lightweight helmet with a special chin guard aiming to increase protection of the operator's face. Complete with visor, hearing protection and room for an anti-dust mask and personal eye protection.



HUSQVARNA SMARTGUARD™ JACKET PE 10 J
The SmartGuard™ jacket is made with reinforced material aiming to increase protection of the operator's neck and chest. The jacket offers comfortable movement, high visibility according to EN20471 class 2. Removable sleeves, smart pockets and ventilation. Sizes S–XXL.

HUSQVARNA SMARTGUARD™ BLADE COVER
Reduces the risk of severe injury from kickbacks and promotes correct technique by guiding the user to the cutting zone.



CUP WHEELS FOR HAND GRINDERS



G HUSQVARNA ELITE-GRIND T-REX SUPER/O

Hard, fast-grinding cup wheels for aggressive removal of floor coatings. For use in the initial stage. Available in two variants for different surfaces. The shape allows better edge reach and pressure distribution.



G HUSQVARNA ELITE-GRIND STAR M/H

A complete series of fast-grinding cup wheels. Offers a high removal rate and long life.



S HUSQVARNA VARI-GRIND ARROW

Medium-hard cup wheels with arrow-shaped segments specially designed for optimal coating removal in a shorter time.



S HUSQVARNA VARI-GRIND

Providing efficient grinding in all materials. Diameters 100–180 mm in four variants for different applications.



B HUSQVARNA TACTI-GRIND

A series of entry-level cup wheels developed for less intensive use. Offers a good performance-cost balance.



G HUSQVARNA ELITE-GRIND TRANSITION

Cup wheel with ceramic bond and turbo segments, designed to reduce scratches before the first polishing stage.

DIAMOND BLADES FOR HAND GRINDERS



S HUSQVARNA VARI-CUT

Blades with a high cutting speed and wear resistance in all materials. Diameters 115–230 mm in six variants for different applications.



B HUSQVARNA TACTI-CUT

Optimised for less intensive professional cutting in most materials. Diameters 115–230 mm in four variants for different applications.

ANGLE/HAND GRINDERS



ELECTRIC-POWERED

HUSQVARNA BHG 125 G125

2200 W, speed 4300–7200 rpm, grinding width 125 mm, 4.7 kg.



ELECTRIC-POWERED

HUSQVARNA BGV 180 AVO

2600 W, speed 6600 rpm, grinding width 180 mm, 5.4 kg.



ELECTRIC-POWERED

HUSQVARNA BHG 180 G180

2200 W, speed 3500–5800 rpm, grinding width 180 mm, 5 kg.

TILE AND MASONRY SAWS



ELECTRIC-POWERED

HUSQVARNA TS 400 F

1500/2200 W, max ∅ 400 mm, max cutting depth 125/230 mm, 96 kg.



ELECTRIC-POWERED

HUSQVARNA TS 350 E

1500/2200 W, max ∅ 350 mm, max cutting depth 100 mm, 92 kg.



ELECTRIC-POWERED

HUSQVARNA TS 300 E

2200 W, max ∅ 350 mm, max cutting depth 100 mm, 82 kg.



ELECTRIC-POWERED

HUSQVARNA TS 73 R

1000 W, max ∅ 230 mm, max cutting depth 50/100 mm, 47 kg.



ELECTRIC-POWERED

HUSQVARNA TS 66 R

800 W, max ∅ 200 mm, max cutting depth 40 mm, 41 kg.



ELECTRIC-POWERED

HUSQVARNA TS 60

1800 W, max ∅ 254 mm, max cutting depth 78/45 mm, 36 kg.



ELECTRIC-POWERED

HUSQVARNA TS 100 R

2200 W, max ∅ 350 mm, max cutting depth 105 mm, 106 kg.

ELECTRIC-POWERED

HUSQVARNA TS 300 E

2200 W, max ∅ 300 (350) mm, max cutting depth 80 (100) mm, 82 kg.

RESIN TOOLS FOR HAND GRINDERS



G HUSQVARNA ELITE-POLISH EP EDGE D

Designed specifically for dry edging work with handheld machines, achieving beautiful results with minimal pressure in as few steps as possible. Inclined segments enable more refined edges and allow you to work closer to walls while extending tool life.



S HUSQVARNA VARI-POLISH VP EDGE W/D

A series of resin-bonded tools for handheld polishing concrete, terrazzo and marble. Velcro attachment.



S VARI-POLISH VC D

Diamond-infused triangular pads, designed for precision edge grinding of corners leaving no untouched areas. Universal VELCRO® brand attachment for use on any machine.



B HUSQVARNA TACTI-POLISH TF EDGE D

Entry level tool for handheld polishing in a wide variety of grit sizes, designed with flexible backing to easily follow surface irregularities. The VELCRO® Brand attachment ensures universal compatibility.

D = Dry **W** = Wet

DIAMOND BLADES



G HUSQVARNA ELITE-CUT

ELITE-level blades for fast, smooth cutting in most construction materials, at the lowest cutting cost per square metre. Diameters 300–1000 mm, in standard or silent variants for different models and applications.



G HUSQVARNA ELITE-CUT GS2

Specific for tiles. Available in diameters 180–350 mm.

WALL SAWS



PRIME

ELECTRIC-POWERED

HUSQVARNA WS 8

High frequency, wireless remote control, diamond blade 500–900 mm, 19 kg, cutting depth 395 mm.



ELECTRIC-POWERED

HUSQVARNA WS 482 HF

High frequency, wireless remote control, diamond blade 600–1600 mm, 28 kg, cutting depth 730 mm.



ELECTRIC-POWERED

HUSQVARNA WS 440 HF

High frequency, wireless remote control, diamond blade 600–1200 mm, 25 kg, cutting depth 530 mm.



ELECTRIC-POWERED

HUSQVARNA WSC 40

Attachment that converts your Husqvarna WS 482 HF and WS 440 HF from blade to chain sawing. Max cutting depth, 400 mm, 19 kg.

DIAMOND TOOLS FOR WALL SAWS



G **HUSQVARNA W 1600 SERIES**

ELITE-level blades for wall saws, with controlled distribution of the diamonds, optimised for wall saw cutting, securing consistent performance from start to finish and throughout the blade's life, resulting in a smoother experience for the operator. Diameters 500–2000 mm.



S **HUSQVARNA W 1100 SERIES**

VARI-level blade for Husqvarna hydraulic and electric wall saws with an ideal design. Fits other machines as well. Diameters 600–1200 mm in three variants for different applications.



G **HUSQVARNA DIAMOND CHAINS AND GUIDE BAR**

ELITE-level diamond chains optimised for use with WSC 40, developed for sawing in reinforced concrete and other construction materials of varying hardness.

WIRE SAWS



HYDRAULIC-POWERED

HUSQVARNA CS 2512

Wire speed 20 or 25 m/s, magazine capacity 12 m (ready to use 15 m), 150 kg.



ELECTRIC-POWERED

HUSQVARNA CS 10

Wire speed 24 m/s, magazine capacity 10 m, 138/135 kg.

DIAMOND WIRES



HUSQVARNA ELITE-WIRE, VACUUM-BRAZED RANGE

Our wires for demanding applications such as cutting pure steel or alloys and highly reinforced concrete. Delivers excellent performance/life balance.



HUSQVARNA VARI-WIRE, SINTERED RANGE

Versatile universal construction wire suited for all types of concrete, from low to high reinforced applications. Can be used on equipment from 10 kW up to 30 kW.

POWER PACKS



ELECTRIC-POWERED

HUSQVARNA PP 518

20, 30, 40 l/min, 140 bar, 10.4 kW, 145 kg.



ELECTRIC-POWERED

HUSQVARNA PP 455 E

65 l/min, 230 bar, 25 kW, 139 kg.



ELECTRIC-POWERED

HUSQVARNA PP 325 E

40 l/min, 140 bar, 9.3 kW, 95 kg.



PRIME

ELECTRIC-POWERED

HUSQVARNA PP 8

3-phase/1-phase 6.5 kW, 18 kg. With radio receiver for operation of WS 8.

NEW



PRIME

ELECTRIC-POWERED

HUSQVARNA PP 7

3-phase/1-phase 6.5 kW, 18 kg.



ELECTRIC-POWERED

HUSQVARNA PP 492

20 kW, 25 kg.

FLOOR SAWS



DIESEL-POWERED
HUSQVARNA FS 7000 DL
Diamond blade max 1500 mm, 1338 kg, cutting depth 625 mm, 55.4 kW *.



DIESEL-POWERED
HUSQVARNA FS 7000 D
Diamond blade max 1000 mm, 1032 kg, cutting depth 411 mm, 55.4 kW *.



DIESEL-POWERED
HUSQVARNA FS 5000 D
Diamond blade max 900 mm, 771 kg, cutting depth 374 mm, 35.5 kW *.



PETROL-POWERED
HUSQVARNA FS 3500 EFI G
Diamond blade max 750 mm, 419 kg, cutting depth 311 mm, 27.5 kW *.



PETROL-POWERED
HUSQVARNA FS 600 E /FS 500 E
Diamond blade max 600/500 mm, cutting depth 240/192 mm, 178/145 kg, 7.5 kW *.



PETROL-POWERED
HUSQVARNA FS 500 SERIES
Diamond blade max 600/500 mm, cutting depth 241/179 mm, 231/197. FS 524, petrol, 15.5 kW *. FS 513, petrol, 8.7 kW *.



DIESEL- / PETROL-POWERED
HUSQVARNA FS 400 SERIES
Diamond blade max 500 mm, cutting depth 189 mm, 163 kg. FS 413, petrol, 8.7 kW *. FS 410 D, diesel, 6.6 kW *.



PETROL-POWERED
HUSQVARNA FS 400 LV
Diamond blade max 450 / 500 mm, cutting depth 162 / 189 mm, 99/120 kg, 8.7 kW *.



PETROL-POWERED
HUSQVARNA FS 300 SERIES
Diamond blade max 350 mm, cutting depth 122/125 mm, 64/54 kg, FS 309, petrol, 6.6 kW *. FS 305, petrol, 3.6 kW *.

DIAMOND BLADES FOR FLOOR SAWS

LARGE FLOOR SAWS FROM 16 KW AND ABOVE

NEW



G S **HUSQVARNA F 1600C SERIES**
New range of diamond blades engineered specifically for reinforced concrete applications. Designed to meet the diverse needs of professionals, this range is available in 2 performance levels:
ELITE Level for exceptional cutting performance tailored to the most demanding users. Experience superior speed, durability, and smooth sawing even in challenging conditions.
VARI Level, a cost-efficient solution that delivers reliable performance for everyday use.
Available in diameters from 350–1800 mm.



G **HUSQVARNA F1500 SERIES**
ELITE-level floor saw blades for asphalt, delivering superior performance. Available in variants optimised for efficient cutting in asphalt. Diameters 500–1500 mm.



G **HUSQVARNA L 600 SERIES**
ELITE-level blades for slot cutting and traffic loops with sandwich design. Available for concrete or asphalt with various segment widths. Diameters 350–450 mm.

SMALL FLOOR SAWS BELOW 16 KW



G **HUSQVARNA ELITE-CUT**
ELITE-level blades with Exo-Grit segments for a smooth, efficient cut – even in heavily reinforced concrete. Diameters 300–600 mm in several variants optimised for different materials.



S **HUSQVARNA VARI-CUT**
VARI-level blades with a high cutting speed and wear resistance. Diameters 300– 500 mm in three variants optimised for different materials.



B **HUSQVARNA TACTI-CUT**
TACTI-level blades optimised for less intensive professional cutting in most materials. Diameters 300–400 mm in three variants optimised for different materials.

* As rated by the engine manufacturer.

BUILDING A SOLID STRUCTURE? WE'RE A SOLID PARTNER.

To build a solid concrete structure you always need to start by ensuring a solid ground layer. That's why we offer one of the industry's most comprehensive ranges of ground compaction equipment. And with our range of well-proven concrete placement equipment, you'll manage all stages and any size of concrete job. Go to husqvarnaconstruction.com for more information.





COMPACTION EQUIPMENT



DIESEL-POWERED
HUSQVARNA LT 8005
3 kW, 92–93 kg.



PETROL-POWERED
HUSQVARNA LT 6005
2.7 kW, 230 mm/ 280 mm, 68–69 kg.



PETROL-POWERED
HUSQVARNA LT 5005
2.7 kW, 150 mm / 230 mm, 60–61 kg.



BATTERY-POWERED
HUSQVARNA LF 60i LAT
1,2 kW, 350 mm, 69 kg, centrifugal force 10.4 kN.

NEW



BATTERY-POWERED
HUSQVARNA LF 75 PACE
1.3 kW, 420 mm, 85 kg without battery, centrifugal force 15 kN.

NEW



BATTERY-POWERED
HUSQVARNA LF 100 PACE
1.5 kW, 500 mm, 100 kg without battery, centrifugal force 17 kN.



PETROL-POWERED
HUSQVARNA LX 90
3.6 kW, 450 mm, 96 kg, Centrifugal force 16 kN.



PETROL-POWERED
HUSQVARNA LF 50 L
3.6 kW, 320 mm, 56 kg, centrifugal force 8.4 kN.



PETROL-POWERED
HUSQVARNA LF 80 L
3.6 kW, 420 mm, 84 kg. centrifugal force 19 kN.



PETROL-POWERED
HUSQVARNA LFV 60
3,6 kW, 350 mm, 64 kg, centrifugal force 10.4 kN.



PETROL-POWERED
HUSQVARNA LFV 80
3,6 kW, 420 mm, 80 kg, centrifugal force 19 kN.



DIESEL-/PETROL-POWERED
HUSQVARNA LFV 100
3.2–3.6 kW, 500 mm, 91/101 kg (petrol/diesel). Centrifugal force 17 kN.



PETROL-POWERED
HUSQVARNA LF 60 LAT
3.6 kW, 350 mm, 70 kg, centrifugal force 10 kN.



PETROL-POWERED
HUSQVARNA LF 75 LAT
3.6 kW, 420–500 mm, 95–97 kg. centrifugal force 15 kN.



PETROL-POWERED
HUSQVARNA LF 80 LAT
3.6 kW, 420 mm, 95 kg, centrifugal force 19 kN.



DIESEL-/PETROL-POWERED
HUSQVARNA LF 100 LAT
3.2–3.6 kW, 500 mm, 109–118 kg, centrifugal force 17 kN.



PETROL-POWERED
HUSQVARNA LF 130 LT
3.2 kW, 500 mm, 142 kg, centrifugal foce 20 kN.



DIESEL-POWERED
HUSQVARNA LH 700
11 kW, 660 mm, 780 kg, centrifugal force 95 kN.



DIESEL-/PETROL-POWERED
HUSQVARNA LG 164
3.1–3.6 kW, 450 mm, 157–170 kg, centrifugal force 28 kN.



DIESEL-/PETROL-POWERED
HUSQVARNA LG 204
3.1–4.3 kW, 500 mm, 211–244 kg, centrifugal force 36 kN.



DIESEL-/PETROL-POWERED
HUSQVARNA LG 300
4.2–6.3 kW, 500–600 mm, 265–307 kg, centrifugal force 40 kN.



DIESEL-/PETROL-POWERED
HUSQVARNA LG 400
6.2–8.3 kW, 650 mm, 398–436 kg, centrifugal force 52 kN.



DIESEL-POWERED
HUSQVARNA LG 505
9.1 kW, 550–850 mm, 470–513 kg, centrifugal force 65 kN.



DIESEL-POWERED
HUSQVARNA LP 9505
18 kW, drum width 850 mm, 1680 kg, centrifugal force 72 kN.

HIGH FREQUENCY ELECTRIC VIBRATORS

NEW



ELECTRIC-POWERED
HUSQVARNA SMART VIBRATORS
1-phase, ∅40–65 mm,
hose length 5, 8.10 m, 13.1–21.2 kg.

NEW



ELECTRIC-POWERED
HUSQVARNA SMART-E VIBRATORS
1-phase, ∅40–56 mm,
hose length 0.5 m, 12–14.8 kg.



ELECTRIC-POWERED
HUSQVARNA AX VIBRATORS
42 V–3–200 Hz, ∅36–65 mm, hose length 5, 8, 10 m, 12–20.5 kg.



ELECTRIC-POWERED
HUSQVARNA VIBRASTAR
42 V–3–200 Hz, ∅40–60 mm, hose length 5 m, 8.4–15 kg.

POWER UNITS FOR AX/VIBRASTAR



ELECTRIC-POWERED
HUSQVARNA CF 67T
Output 42 V–3–200 Hz, 4.7 kVA, 67A, 70 kg, 4 outlets.



ELECTRIC-POWERED
HUSQVARNA CF 25
Output 42 V–3–200 Hz, 1.8 kVA, 25A, 31 kg, 2 outlets.



ELECTRIC-POWERED
HUSQVARNA CF 11
Output 42 V–3–200 Hz, 0.8 kVA, 11A, 18 kg, 1 outlet.

MODULAR FLEX-SHAFT VIBRATORS



ELECTRIC-POWERED
HUSQVARNA AME 1600
1-phase, 1.6 kW, 6.1 kg.



HUSQVARNA SUPERFLEX SERIES
Flexible shafts 1/2/3/4 m, 2.4–7.3 kg.



HUSQVARNA AT SERIES
Vibrator heads. ∅29–59 mm, 1.3–3.9 kg.

EXTERNAL VIBRATORS



ELECTRIC-POWERED
HUSQVARNA HIGH SPEED VIBRATORS
3 versions, speed 6000 rpm, max. centrifugal force 7400–16000 N.



ELECTRIC-POWERED HUSQVARNA NORMAL SPEED VIBRATORS
4 versions, speed 3000 rpm, max. centrifugal force 3000–12000 N.

MECHANICAL VIBRATORS



PETROL-POWERED
HUSQVARNA AMG 3200
Drive unit for AA and AZ vibrators. 2.8 kW, 15 kg.



HUSQVARNA AA SERIES
Hose length 6 m, 2 diameters: 65–75 mm.



HUSQVARNA AZ SERIES
Hose length 4.8 m, 4 diameters: 25–55 mm.

PNEUMATIC VIBRATORS



PNEUMATIC-POWERED
HUSQVARNA AY SERIES
5 diameters, 35–105 mm, hose length 4 m, 4–28 kg.

CONCRETE SCREEDS AND BLADES



BATTERY-POWERED
HUSQVARNA BV 30i
Output power 0.8 kW, weight 11.5 kg. BLi-X 36 V battery platform.



PETROL-POWERED
HUSQVARNA BV 30
1 kW, centrifugal clutch, 14 kg.



HUSQVARNA BV 30 SCREED BLADE
1.8/2.4/3.0/3.6/4.2 m.

MODULAR SCREEDS



ELECTRIC-POWERED
HUSQVARNA BT 90 E
3 kW, 20 m, 96 kg.



PETROL-POWERED
HUSQVARNA BT 90 G
5 kW, 20 m, 93 kg.



HUSQVARNA BT 90 G/E SCREED SECTION
0.5/0.75/1/2/3 m.



HUSQVARNA BT 90 CROWN INVERT BRACKET
267 mm, maximum angle 15°.

RIDE-ON TROWELS AND POWER TROWELS



NEW

PETROL-POWERED
HUSQVARNA CRT 48 PS
Ideal for finishing surfaces 1000–2500 m². The power steering enables accurate manoeuvring and virtually fatigue-free operation with two control modes to accommodate operator preference in varying site conditions. 42.5 kW, 2×1220 mm, 660 kg.



NEW

PETROL-POWERED
HUSQVARNA CRT 48
Ideal for finishing surfaces 1000–2000 m². Featuring a superior mechanical steering system and balanced power-to-weight ratio. 27.6 kW, 2 × 1220 mm, 579 kg.



PETROL-POWERED
HUSQVARNA CRT 36
Ideal for finishing surfaces 250–1000 m². Featuring a superior mechanical steering system and balanced power-to-weight ratio. 16.5 kW, 2×915 mm, 451 kg.



PETROL-POWERED
HUSQVARNA CT 48
5.9–8.7 kW, 1180 mm, 105–125 kg.



PETROL-POWERED
HUSQVARNA CT 36
3.6–5.9 kW, 875 mm, 85–94 kg.



PETROL-POWERED
HUSQVARNA BG 475
6.3 kW, 1140 mm, 105 kg.



PETROL-POWERED
HUSQVARNA BG 375
3.6–6.3 kW, 900 mm, 88–102 kg.



PETROL-POWERED
HUSQVARNA BG 245
3.6 kW, 600 mm, 62 kg.




ELECTRIC-POWERED
HUSQVARNA BG COMBI
1.8–2.4 kW, 1020–850 mm, 88–86 kg.




ELECTRIC-POWERED
HUSQVARNA BG 245 E
1.5 kW, 600 mm, 60 kg.

TOOLS RIDE-ON TROWELS AND POWER TROWELS



HUSQVARNA HIPERTROWEL™ FLOOR POLISHING SYSTEM
Polish large concrete floors fast with a ride-on power trowel and Hiperflex TRW tool pads mounted on flexible Hipertrowel™ gyro drivers.

NEW

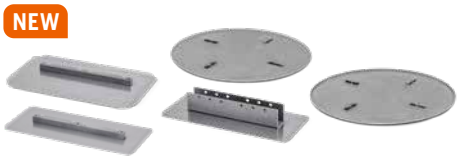

S **HUSQVARNA VARI-TROWEL™ BLADES AND PANS**

SOFF-CUT® ULTRA EARLY ENTRY™ SAWS



PETROL-POWERED
HUSQVARNA SOFF-CUT 4000
Diamond blade max 350 mm, cutting depth max 70 mm, 191 kg, 14.9 kW*.



PETROL-POWERED
HUSQVARNA SOFF-CUT 2000
Diamond blade max 250 mm, cutting depth max 38 mm, 144 kg, 6.5 kW*.



BATTERY-POWERED
HUSQVARNA SOFF-CUT 150 PACE
Diamond blade max 165 mm, cutting depth max 38 mm, 41 kg, 2.7 kW.



PETROL-POWERED
HUSQVARNA SOFF-CUT 150
Diamond blade max 165 mm, cutting depth max 38 mm, 40 kg, 3.5 kW*.

DIAMOND BLADES FOR ULTRA EARLY ENTRY™ SAWS





HUSQVARNA SOFF-CUT® BLADES AND SKID PLATES

Husqvarna Soff-Cut® diamond blades are specifically designed for Ultra Early Entry™ sawing in fresh concrete with Soff-Cut® saws. The blades feature high-quality, precisely graded diamonds for reliably clean cuts. Choose from a full range of blades designed for different types of aggregate. Available in three performance levels: ELITE, VARI, and TACTI. Diameters 150–350 mm.


Each blade includes an anti-ravelling skid plate for smooth, stable operation.

* As rated by the engine manufacturer.

THE COMPLETE PARTNER IN SURFACE PREPARATION

Open your eyes to the possibilities provided by the industry's most comprehensive range of surface preparation solutions. By combining our extensive know-how with a wider range of machines, we can meet all your surface preparation needs – from shot and steel blasting, to scraping, scarifying, grinding and much more.



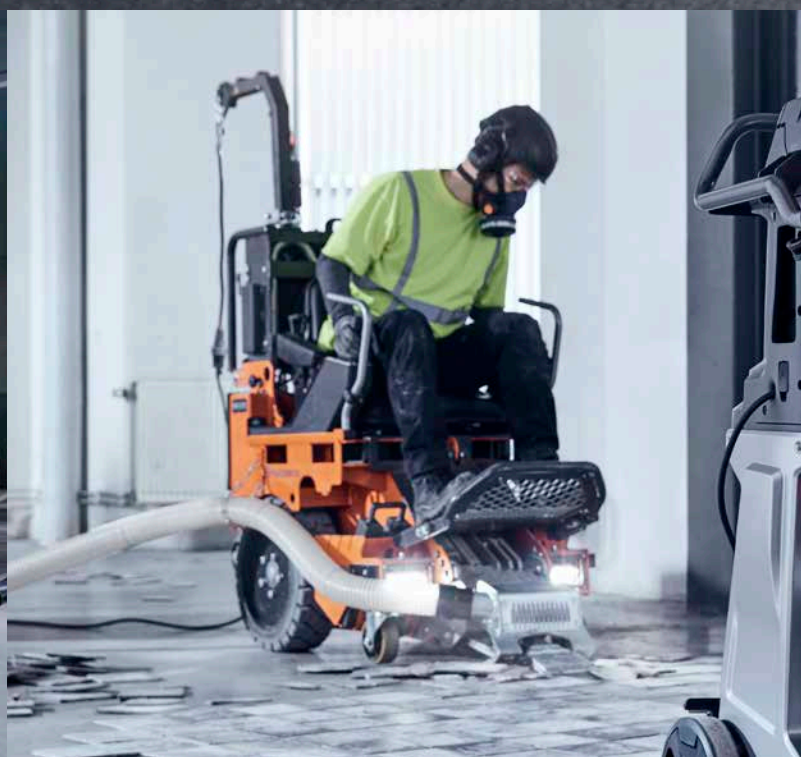

FLOOR SCRAPERS AND TOOLS



BATTERY-POWERED
HUSQVARNA BMS 220ADB
Ride-on, 4 kW battery powered, 48 V, 960 kg.



ELECTRIC-POWERED
HUSQVARNA BMS 150
Ride-on, 2.2 kW, 230 V/16 A, 480 kg.



ELECTRIC-POWERED
HUSQVARNA BS 110
1.5 kW, 230 V/16 A, 170 kg.



ELECTRIC-POWERED
HUSQVARNA BS 75
1.5 kW, 230 V/16 A, 128 kg.

NEW



G **HUSQVARNA SCRAPER TOOLS**
S Flat and self-scoring blades and blade holders. Husqvarna offers several optional blades for each different floor scraper and application.
B

FLOOR SCARIFIERS AND TOOLS



ELECTRIC-POWERED
HUSQVARNA BMP 4000RC
Remote controlled. 30 kW, 400 V/63 A, 400 mm scarifying width, 380 mm shaving width, 2112 kg.



ELECTRIC-POWERED
HUSQVARNA BMP 335
12 kW, 400 V/32 A, 335 mm working width, 393 kg.



PETROL-POWERED
HUSQVARNA BMP 265 PETROL
6 kW, petrol, 265 mm working width, 190 kg.



ELECTRIC-POWERED
HUSQVARNA BMP 265
5.5 kW, 400 V/16 A, 265 mm working width, 175 kg.



PETROL-POWERED
HUSQVARNA CG 200
3.6 kW, petrol, working width 200 mm, 54 kg.



ELECTRIC-POWERED
HUSQVARNA CG 200
2.2 kW, 220–240 V, grinding width 200 mm, 58 kg.



HUSQVARNA SCARIFYING TOOLS
An ELITE-level range of scarifying drums with different steel and carbide wheels that cover applications from coating removal to grooving.

FLOOR SHAVERS AND TOOLS



ELECTRIC-POWERED
HUSQVARNA BMP 4000RC
Remote controlled. 30 kW, 400 V/63 A, 400 mm scarifying width, 380 mm shaving width, 1550 kg.



ELECTRIC-POWERED
HUSQVARNA BMC 335
16 kW, 400 V/32–63 A, 335 mm working width, 430 kg.



HUSQVARNA SHAVING TOOLS
We offer different shaving blades for each individual machine and application.



HUSQVARNA SHOT BLASTERS AND STEEL BLASTERS

We supply a large range of shot blasting equipment. All our shot blasting machines are characterised by their manoeuvrability, precision and versatility. With all our shot blasters, you are able to work in a close to dust-free environment when they are connected to an appropriate dust extractor.

HUSQVARNA SHOT BLASTERS



ELECTRIC-POWERED
HUSQVARNA BLASTRAC 2-48DS
2×22 kW, 400 V, 125 A, working speed 0.5–33 m/min, working width 1220 mm, 1350 kg.



ELECTRIC-POWERED
HUSQVARNA BLASTRAC 2-20DT
2×11 kW, 400 V, 63 A, working speed 0.5–33 m/min, working width 550 mm, 575 kg.



ELECTRIC-POWERED
HUSQVARNA BLASTRAC 1-15DS
15 kW, 400 V, 63 A, working speed 0.5–25 m/min, working width 380 mm, 450 kg.



ELECTRIC-POWERED
HUSQVARNA BLASTRAC 1-10DS
11 kW, 400 V, 32/63 A, working speed 0.5–25 m/min, working width 254 mm, 395 kg.



ELECTRIC-POWERED
HUSQVARNA BLASTRAC 1-10DPS75
7.5 kW, 400 V, 16 A, working speed 0.5–30 m/min, working width 254 mm, 211 kg.



ELECTRIC-POWERED
HUSQVARNA BLASTRAC 1-8DPF40
4 kW, 400 V, 16 A, working speed 0.5–23 m/min, working width 203 mm, 122 kg.



ELECTRIC-POWERED
HUSQVARNA BLASTRAC 1-8DPS30
3 kW, 230–400 V, 16 A, working speed 0.5–23 m/min, working width 203 mm, 125 kg.



ELECTRIC-POWERED
HUSQVARNA BLASTRAC 1-8D
2.2 kW, 230 V, 14 A, working speed manual, working width 203 mm, 102 kg.

HORIZONTAL STEEL BLASTERS



ELECTRIC-POWERED
HUSQVARNA BLASTRAC EBE 500
(50/60 Hz) 22 kW, 400 V, 63 A, working speed 1–15 m/min, working width 500 mm, 742 kg.



ELECTRIC-POWERED
HUSQVARNA BLASTRAC EBE 350
11 kW, 400 V, 32 A, working speed 1–15 m/min, working width 350 mm, 430 kg.



ELECTRIC-POWERED
HUSQVARNA BLASTRAC EBE 350EX
11 kW, 400 V, 32 A, working speed 1–15 m/min, working width 350 mm, 450 kg.

VERTICAL STEEL BLASTERS



ELECTRIC-POWERED
HUSQVARNA BLASTRAC EBE 900 V
2×22 kW, 400 V, 125 A, working speed 0.5–10 m/min, working width 890 mm, 880 kg.

DUST COLLECTORS



ELECTRIC-POWERED
HUSQVARNA BLASTRAC DC 900
17 kW, 400 V, 32 A, 860 kg.



ELECTRIC-POWERED
HUSQVARNA BLASTRAC DC 2-48
18 kW, 400 V, 32 A, 1107 kg.



ELECTRIC-POWERED
HUSQVARNA BLASTRAC DC 975
7.5 kW, 400 V, 63 A, 510 kg.



ELECTRIC-POWERED
HUSQVARNA BLASTRAC DC 655
6.6 kW, 400 V, 63 A, 481 kg.



ELECTRIC-POWERED
HUSQVARNA BLASTRAC DC 350EX
5.5 kW, 400 V, 63 A, 665 kg.

HUSQVARNA MAGNETIC BROOM



HUSQVARNA MAGNETIC BROOM R900



HUSQVARNA MAGNETIC BROOM R600



HUSQVARNA MAGNETIC SWEEPER

ABRASIVES



HUSQVARNA ABRASIVES
S330, S390, S460, S550, S660

PLANETARY GRINDERS

NEW



ELECTRIC-POWERED
HUSQVARNA AUTOGRINDER™
Self-operating. 16.5 kW, 380–415 V, 3-phase, grinding width 800 mm, grinding disc 3 × 270 mm, 661 kg.



ELECTRIC-POWERED
HUSQVARNA HTC 950 RX
15 kW, 380–415, 440–480 V, 3-phase, grinding width 920 mm, grinding disc 4 × 270 mm, 600 kg.



ELECTRIC-POWERED
HUSQVARNA PG 8 DR
16.5 kW, 380–415 V, 3-phase, grinding width 800 mm, grinding disc 3 × 270 mm, 661 kg.



ELECTRIC-POWERED
HUSQVARNA PG 8 XR
15 kW, 380–415 V, 3-phase, grinding width 800 mm, grinding disc 4 × 270 mm, 645 kg.



ELECTRIC-POWERED
HUSQVARNA PG 8 S
11 kW, 380–415 V, 3-phase, grinding width 800 mm, grinding disc 3 × 270 mm, 508 kg.



ELECTRIC-POWERED
HUSQVARNA PG 6 DR
12.5 kW, 380–415 V, 3-phase, grinding width 640 mm, grinding disc 3 × 270 mm, 591 kg.



ELECTRIC-POWERED
HUSQVARNA PG 6 XR
7.5 kW, 380–415 V, 3-phase, grinding width 600 mm, grinding disc 4 × 230 mm, 495 kg.



ELECTRIC-POWERED
HUSQVARNA PG 6 S
7.5 kW, 380–415 V, 3-phase, grinding width 600 mm, grinding disc 3 × 230 mm, 335 kg.



ELECTRIC-POWERED
HUSQVARNA PG 5
4.0 kW, 380–415 V, 3-phase, grinding width 515 mm, grinding disc 3 × 230 mm, 183 kg.



ELECTRIC-POWERED
HUSQVARNA PG 5 S
2.2 kW, 400–220 V, 3-phase/1-phase, grinding width 515 mm, grinding disc 3 × 230 mm, 169 kg.



ELECTRIC-POWERED
HUSQVARNA PG 510
4.0–2.2 kW, 400–220 V, 3-phase/1-phase, grinding width 515 mm, grinding disc 3 × 230 mm, 133/120 kg.



ELECTRIC-POWERED
HUSQVARNA PG 450
2.2 kW, 230 V, 1-phase, grinding width 450 mm, grinding disc 3 × 180 mm, 109 kg.

SINGLE DISC GRINDERS



ELECTRIC-POWERED
HUSQVARNA PG 400
4 kW, 400 V, 3-phase, grinding width 400 mm, 110 kg.



PETROL-POWERED
HUSQVARNA PG 400 PETROL
Grinding width 400 mm, 140 kg.



ELECTRIC-POWERED
HUSQVARNA PG 280
3–2.2 kW, 400–220 V, 3-phase/1-phase, grinding width 280 mm, 72 kg.



ELECTRIC-POWERED
HUSQVARNA HTC 270 EG
2.2 kW, 230 V, 1-phase, grinding width 270 mm, 103 kg.



ELECTRIC-POWERED
HUSQVARNA BG 250
5.5 kW, 400 V, 3-phase, grinding width 250 mm, 146 kg.



ELECTRIC-POWERED
HUSQVARNA BGS 250
2.2 kW, 230 V, 1-phase, grinding width 250 mm, 62 kg.

METAL TOOLS FOR REMOVAL AND GRINDING



G HUSQVARNA EZ T-REX®
S EZchange™ tool system with PCD segments for aggressive removal of various types of coatings, resulting in a clean surface with efficiency and precision.



G HUSQVARNA ELITE-GRIND EZ-SERIES
EZchange™ tool system consisting of six different tool types to efficiently grind and prepare concrete floors of varying hardness. The result: smooth and exposed surfaces with a consistent scratch pattern.



S HUSQVARNA VARI-GRIND EZ-SERIES
EZchange™ tool system of concrete grinding tools ideal for users looking for the best price-performance ratio. Available in three bonds and three grit sizes.



B HUSQVARNA TACTI-GRIND EZ-SERIES
EZchange™ tool system for concrete grinding where cost is the first criteria of selection. Available in one bond with three grit sizes.



G HUSQVARNA ELITE-GRIND SGW
Metal bonded tool with cross attachment system specifically designed to smoothly wet grind natural stone floors. Part of the EZchange™ tool system.



S HUSQVARNA VARI-GRIND EZ SL
The wood series is a single-layer diamond tool specifically developed for efficient initial grinding of wood. Part of the EZchange™ tool system.




G HUSQVARNA RAVAGER
Developed for creating a bush-hammered surface or to expose large aggregates.



HUSQVARNA TOOL HOLDERS
The Husqvarna EZchange™ tool holder range is designed to maximise productivity while minimising downtime. The tool holders are engineered to support the tools and make the tool-change process hassle-free.

NEW



G HUSQVARNA GRINDING DISCS
S
B 250 mm/10" bolt-on grinding discs for high removal applications. Designed for Husqvarna BGS/BG 250.

SURFACE TEST EQUIPMENT



HUSQVARNA BOT3000E FRICTION TESTER
A portable fully-automatic instrument to test slip resistance of floors. Measures both SCOF and DCOF in both wet and dry conditions.



HUSQVARNA MAHRSURF PS10 – ROUGHNESS TESTER
A mobile surface roughness tester. Measures 31 parameters, for example Ra, Rz, Rmax.



HUSQVARNA RHOPOINT IQ – GLOSS AND DOI METER
A powerful mobile surface quality tester. Measures Gloss, DOI and HAZE.



HUSQVARNA MG6-SS GLOSS CHECKER
A portable gloss meter specifically developed for stone. Measuring angle 60°.



ICRI PROFILE PLASTIC CHIPSET
A chipset with 10 different plastic samples corresponding with CSP 1–10 according to the ICRI specifications.



HUSQVARNA MOHS TEST KIT SURFACE HARDNESS TESTER
A scratch test kit to determine the hardness of concrete or any hard floor in relation to the Mohs scale.



PENETRATION TEST – KARSTEN PIPE TEST KIT
A water penetration test kit used as a rapid testing procedure of water penetration in building materials.

Annual recalibration must be carried out by the owner. Husqvarna is not responsible for performing or ensuring this recalibration. Refer to the product manual.

FLOOR TREATMENT PRODUCTS



FLOOR GROUTING SYSTEM
For pore filling of pin-holes and micro cracks in concrete surfaces: GM 3000 20 l, GM+ 9 l.



FLOOR HARDENING SYSTEM
For making concrete more wear resistant and dust-free: CURE (K) 20 l, CURE (L) 20 l, CURE+ 20 l/200 l.



FLOOR PROTECTION SYSTEM
For protecting the surface against stains: Premium Guard WB 5 l/10 l, Premium Guard SB 5 l/10 l, Topical Guard SiRO 10 l, Topical Guard 20 l, Topical Guard Color LG 20 l, Topical Guard Color DG 20 l.



FLOOR CLEANING SYSTEM
For cleaning and maintenance: Clean & Protect 5 l.

RESIN TOOLS FOR POLISHING




G HUSQVARNA ELITE-POLISH ET D
For the efficient removal of scratches and a safer transition when shifting from metal to resin bonded tools. EZchange™ attachment system.



S HUSQVARNA VARI-POLISH VT W/D
Transitional puck for wet concrete, terrazzo and natural stone polishing. Specially designed for aggressive scratch removal. The rubber backing adds flexibility for managing low spots on irregular floors. Universal VELCRO® brand attachment.



B HUSQVARNA TACTI-POLISH TT W
Cost-effective transitional puck for wet polishing of concrete, terrazzo and natural stone. Designed for aggressive scratch removal. The rubber backing adds flexibility for managing low spots on irregular floors. Universal VELCRO® brand attachment.



G HUSQVARNA ELITE-POLISH EP D
This high-performing concrete polishing tools series performs on all types of concrete. EZchange™ attachment system.



S HUSQVARNA VARI-POLISH VP W/D
Resin bond polishing pads can be chosen for high-end polishing. Grit range from 50 to 3,000. Universal VELCRO® brand attachment.



B HUSQVARNA TACTI-POLISH TP D
Entry-level polishing pucks for stress-free polishing in a wide range of grit sizes. Universal VELCRO® brand attachment.



G HUSQVARNA ELITE-POLISH EF W/D
Premium resin technology with an optimised flexible design to achieve a high level of polishing and gloss. EZchange™ attachment system.



S HUSQVARNA VARI-POLISH VF D
Optimal for polishing concrete and cementitious toppings such as overlays or screed. It's the best troubleshooting product for all kinds of problems.



G HUSQVARNA ELITE-POLISH EB/EM W/D PADS
Diamond-impregnated maintenance pads, ideal for cleaning polished concrete floors. Fits both auto scrubbers and grinding machines. VELCRO® or EZchange™ attachment system.



G HUSQVARNA ELITE-POLISH EO D
A high-performance, resin-bonded transitional tool for cementitious overlays. Universal VELCRO® attachment for use on any machine.



G HUSQVARNA ELITE-POLISH EX D
Top-of-the line tools for dry grinding and polishing of natural stone surfaces. EZchange™ attachment system.



S HUSQVARNA VARI-POLISH VS D
Specially designed for sanding when restoring wooden floors. Universal VELCRO® brand attachment for use on any machine. Use together with Husqvarna Foamflex pads.

D = *Dry*
W = *Wet*

LARGE DUST EXTRACTORS

JET-PULSE MACHINES FOR FULL AIR FLOW APPLICATIONS



ELECTRIC-POWERED
HUSQVARNA T 10000
11 kW, 400 V, 3-phase, 32 A, 900 m³/h, 336 kg.



ELECTRIC-POWERED
HUSQVARNA T 7500
5.5 kW, 400 V, 3-phase, 12 A, 600 m³/h, 206 kg.



ELECTRIC-POWERED
HUSQVARNA HTC D80
7.5 kW, 380–415 V, 3-phase, 16.7 A, 700 m³/h, 272 kg.



ELECTRIC-POWERED
HUSQVARNA HTC D60
5.5 kW, 380–415 V, 3-phase, 15 A, 530 m³/h, 179 kg.

PRE SEPARATORS

FOR EXTENDED DUST LOADING CAPACITY



HUSQVARNA C 5500
76 mm, 100 l, 67 kg.



HUSQVARNA C 3000
63 mm, 37 l, 27 kg.

SMALL DUST EXTRACTORS

PRODUCTIVE JET-PULSE MACHINES WITH AUTOMATIC FILTER CLEANING FOR FULL AND STABLE AIR FLOW APPLICATIONS



ELECTRIC-POWERED
HUSQVARNA DE 130 H
3 kW, 230 V, 1-phase, 15 A, 415 m³/h, 48 kg, IP55.

NEW



ELECTRIC-POWERED
HUSQVARNA DE 35 H
1.6 kW, 230 V, 1-phase, 10 A, 266 m³/h, 16 kg, IPX4.

VERSATILE JET-PULSE MACHINES WITH E-FLOW FOR FULL AND STABLE AIR FLOW APPLICATIONS



ELECTRIC-POWERED
HUSQVARNA DE 120 H
2.2 kW, 230 V, 1-phase, 15 A, 480 m³/h, 39 kg, IP55.



ELECTRIC-POWERED
HUSQVARNA DE 110 H
1.1 kW, 230 V, 1-phase, 5 A, 240 m³/h, 25 kg, IP54.

SIMPLE JET-PULSE MACHINES FOR FULL AIR FLOW APPLICATIONS

NEW



ELECTRIC-POWERED
HUSQVARNA DE 120 SH
1.8 kW, 230 V, 1-phase, 8 A, 430 m³/h, 39 kg, IP55.



ELECTRIC-POWERED
HUSQVARNA DE 110 SH
0.9 kW, 230 V, 1-phase, 4 A, 215 m³/h, 25 kg, IP54.



BATTERY-POWERED
HUSQVARNA DE 120 H PACE
2.2 kW, Husqvarna PACE 94V battery, 410 m³/h, 41 kg, IPX4.



BATTERY-POWERED
HUSQVARNA DE 110i H
0.9 kW, Husqvarna BLi-X 36V battery, 200 m³/h, 26 kg, IPX4.

SLURRY VACUUMS

WITH EVACUATION PUMP FOR FILTRATION, CONTAINMENT AND WASTE FROM LIQUIDS AND SLURRY



ELECTRIC-POWERED
HUSQVARNA W 70 P
1.85 kW, 230 V, 1-phase, 5.2 A, 200 m³/h, 42 kg.



ELECTRIC-POWERED
HUSQVARNA W 250 P
1.55 kW, 230 V, 1-phase, 5.2 A, 160 m³/h, 26 kg.

FOR FILTRATION AND CONTAINMENT OF LIQUIDS AND SLURRY



ELECTRIC-POWERED
HUSQVARNA W 70
1.2 kW, 230 V, 1-phase, 5.2 A, 200 m³/h, 32 kg.

AIR CLEANERS

FOR FILTRATION OF AIRBORNE DUST



NEW

ELECTRIC-POWERED
HUSQVARNA A 100
0.6 kW, 230 V, 1-phase, 2.7 A, 2010 m³/h, 42 kg, IP54.



ELECTRIC-POWERED
HUSQVARNA A 45
0.5 kW, 230 V, 1-phase, 2.3 A, 1000 m³/h, 20 kg, IP54.



ELECTRIC-POWERED
HUSQVARNA A 25
0.2 kW, 230 V, 1-phase, 1 A, 540 m³/h, 14 kg, IP54.

TEAMMATES THAT GIVE YOU MORE THAN POWER

As an expert in controlled demolition, you know exactly how to get the job done – and our solutions let you do it smarter, with better performance and new levels of power. Explore what you can accomplish with the DXR demolition robots from Husqvarna. Get ready to experience power and control like you never have before.



REMOTE DEMOLITION ROBOTS



HUSQVARNA DXR 315
27 kW, 2110 kg, reach 5.5/5.2 m up/forward
incl. tool.



HUSQVARNA DXR 305
27 kW, 2050 kg, reach 5.2/4.9 m up/forward
incl. tool.



HUSQVARNA DXR 275
24 kW, 1850 kg, reach 4.8/4.5 m up/forward
incl. tool.



HUSQVARNA DXR 145
18.5 kW, 1040 kg, reach 4.4/3.7 m up/forward
incl. tool.



HUSQVARNA DXR 95
9.8 kW, 589 kg, reach 3.2/2.7 m up/forward
incl. tool.

TOOLS AND ACCESSORIES FOR DEMOLITION ROBOTS



HUSQVARNA DCR 500, DCR 100 AND DCR 90
With these powerful crushers you can easily crush a 270–467 mm-thick concrete wall, staircases and pillars, etc.



ER 50 AND ER 40
Highly productive rotary drum cutters for trenching, surface removal and profiling in rock, concrete and hard soil.



HUSQVARNA DSS 200
Steel shearer for demolishing structures, piping, process vessels and tanks. Ideal in sensitive areas such as process industries. For Husqvarna DXR 315, DXR 305, DXR 275 and DXR 145.



SB 302, SB 202, SB 152, SB 102 AND SB 52
Hydraulic breakers with outstanding knocking force.



HUSQVARNA BUCKETS
Available for all Husqvarna demolition robots in three sizes: standard, wide and narrow.



MG 200 AND MG 100
Multi-grapples that offer low operating weight with high gripping volume.



LONG WORKING TOOLS
Enables longer reach and increased distance between the DXR and the work object.



HEAT PROTECTION KIT
Enables work in hot applications by protecting vital parts from damage by radiant and conduction heating.



ENHANCED COOLING KIT
Enables continuous work with full power in high ambient temperatures.



STEEL TRACKS
Enables work in hot applications, as well as where sharp objects are present. For Husqvarna DXR 315, DXR 305, DXR 275 and DXR 145.



EX 20 PATCH PLANER
The Patch Planer is an excellent choice for asphalt repairs, concrete removal, and milling layers of screed. Thanks to manually adjustable cutting depth, it ensures precise control for consistent, even results every time.



HEARING PROTECTION WITH HEADBAND
Comfortable and lightweight with a flexible padded headband. Design allows for a 20 % adjustment of pressure. Approved according to current EN standards.



HUSQVARNA X-SYNC HEADBAND
Professional hearing protection with Bluetooth® connectivity. Active sound management lets you hear ambient noise, take hands-free calls, stream audio, or enjoy the built-in FM radio—all while safeguarding your ears from harmful noise.



PROTECTIVE GLASSES, CLEAR X
Protective glasses with non-scratch, clear lenses that can be angled and extendable frames. Approved as per EN 166 and Ansi Z87+.



GLOVES, CLASSIC
A one-size durable glove made with a goat leather palm and spandex fabric on the back. Rubberised cuff with cotton binding for a perfect fit around the wrist.



FUEL CAN
Our range of accessories also includes our in-house developed petrol can, which holds 6 l and is fitted with an effective level control.



HUSQVARNA SMARTGUARD™ HELMET PE 10 H
Sturdy yet lightweight with a special chin guard to increase protection of the operator's face. Complete with visor and hearing protection, with room for anti-dust mask and personal eye protection.



HUSQVARNA SMARTGUARD™ JACKET PE 10 J
Sturdy and comfortable protective jacket made with reinforced material to increase protection of the operator's neck and chest. High visibility according to EN20471 class 2. Removable sleeves, smart pockets and ventilation. Size S–XXL.



Husqvarna®

husqvarnaconstruction.com

Copyright © 2026 Husqvarna AB (publ). All rights reserved. Husqvarna and other product and feature marks are trademarks of the Husqvarna Group. We reserve the right to make changes in technology and specifications without prior notice.